

ALASKA NATIVE CLAIMS SETTLEMENT ACT
(ANCSA) SECTION 14(c),
TRACTS A THROUGH K; THE SUBDIVISION
OF LOT 8, U.S. SURVEY 3529; AND THE SUBDIVISION
OF TRACT B, U.S. SURVEY 4877,
P.L. 92-203 (85 STAT. 688, 702, 703)

LEVELOCK NATIVES, LIMITED
AT
LEVELOCK, ALASKA

AND THE DEPENDENT RESURVEY
OF PORTIONS OF
U.S. Survey Nos. 1537, 3139, 3159, 3529, and 4877

This plat contains the entire survey record.

The history of surveys is referenced on sheet number 2.

This survey was executed by Stanley E. Sears, Registered Alaska Land Surveyor No. 2087-S, for Bristol Bay Native Corporation, August 20, 2001 through September 3, 2001 and April 9, 2002 through April 13, 2002, in accordance with the principles set forth in the Manual of Surveying Instructions, 1973, Special Instructions dated January 18, 2001, approved January 19, 2001, under Contract No. NAC-010111, awarded August 15, 2001 and Notice to Proceed dated August 18, 2001.

Field assistants were:

Tom R. Moore, Surveying Technician
Mark J. Hall, Surveying Technician
Marlene M. O'Domin, Surveying Aide
Taylor M. Moore, Surveying Aide

Area Surveyed: 277.16

The geographic position of corner No. 14, Tract A, identical with corner No. 3, Tract C, U.S. Survey No. 4877, as determined by a direct tie to National Geodetic Survey triangulation station "LEVELOCK", Alaska, is:

Latitude: 59° 06' 53.375" North (NAD 27)
Longitude: 156° 52' 15.676" West

This survey was accomplished using global positioning systems (GPS). The control was obtained using static, fast static, and real time kinematics (RTK) with GPS carrier phase receivers. Monuments were positioned using RTK, and positions were confirmed with a redundant fast static observation.

The mean magnetic declination was computed by U.S.G.S. Geomag program using AK-2000.COF model as of August 20, 2001.

This survey is situated within Townships 11 South, Ranges 43 and 44 West, Township 12 South, Range 45 West, and Township 13 South, Range 46 West, Seward Meridian, Alaska.

UNITED STATES DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
Anchorage, Alaska



The survey represented by this plat, sheets 1 through 10 having been properly executed and examined, is hereby accepted for having fulfilled the requirements of Section 14(c) of the Alaska Native Claims Settlement Act.

For the Director



Must C. Parnos 26 March 2004
(ACTING) Date

Deputy State Director for Cadastral Survey, Alaska



ENLARGED DIAGRAM B

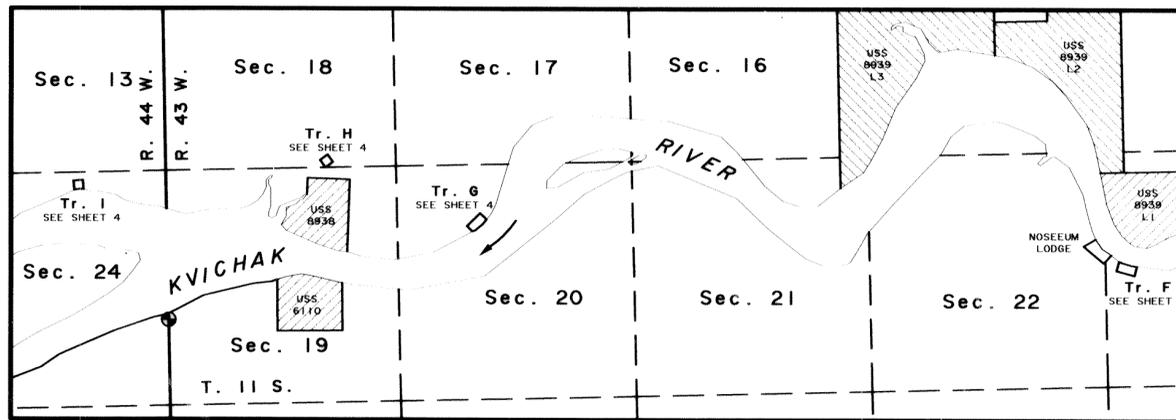

ENLARGED DIAGRAM A

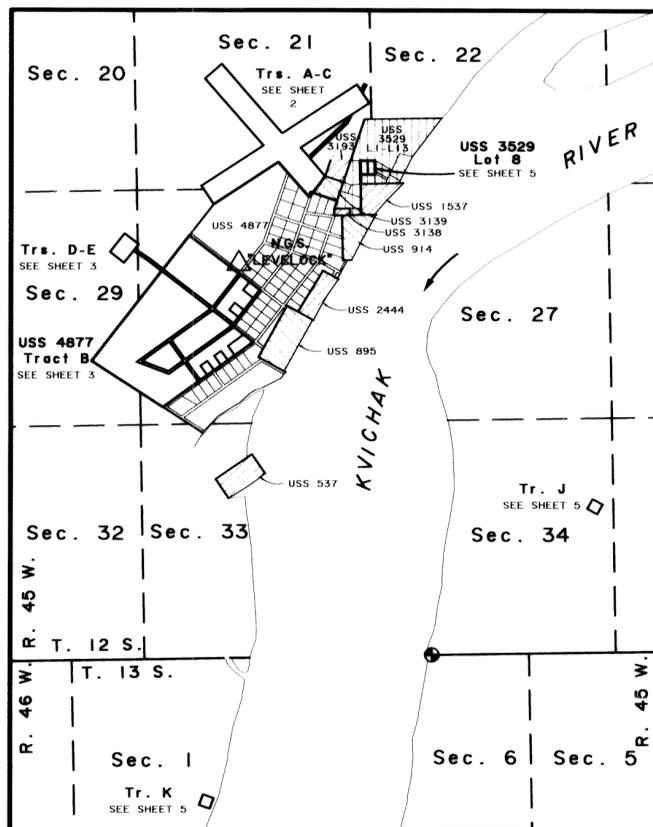

VICINITY DIAGRAM

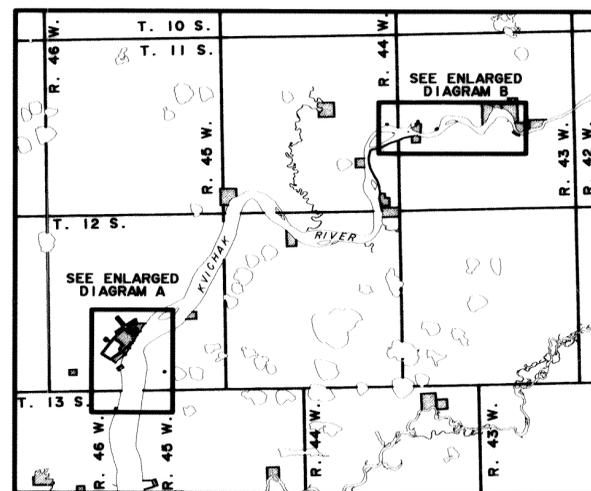

True Meridian
Mean Magnetic Declination 18° E.

I, STANLEY E. SEARS, Registered Alaska Land Surveyor No. 2087-S, for Bristol Bay Native Corporation, HEREBY CERTIFY upon honor that I have executed the ANCSA 14(c) Survey depicted on this plat, sheets 1-10, in conformity with the Special Instructions dated January 18, 2001, approved January 19, 2001, Contract No. NAC-010111, awarded August 15, 2001, the principles of survey described in the Manual of Instructions for the Survey of Public Lands of the United States, 1973, and in the specific manner described on this plat.

November 12, 2003
Date

Stanley E. Sears
Registered Land Surveyor



I hereby certify that Tracts A through K, the subdivision of Lot 8, U.S. Survey 3529, and the subdivision of Tract B, U.S. 4877, represented on this plat of survey are on lands Interim Conveyed to Levelock Natives Limited, by Patent Nos. 50-79-0092, 50-89-0751, and 50-99-028, and Interim Conveyance No. 193, issued by the United States of America. Said tracts also fulfill all entitlements under the provisions of ANCSA 14(c) as requested by Levelock Natives Limited ANCSA 14(c) Map of Boundaries approved April 16, 2000.

3-18-04
Date

Bob [Signature]
President, Levelock Natives Limited

ALASKA NATIVE CLAIMS SETTLEMENT ACT
(ANCSA) SECTION 14(c),
TRACTS A THROUGH K; THE SUBDIVISION OF
LOT 8, U.S. SURVEY 3529; AND THE SUBDIVISION
OF TRACT B, U.S. SURVEY 4877,
P.L. 92-203 (85 STAT. 688, 702, 703)

LEVELOCK NATIVES, LIMITED
AT
LEVELOCK, ALASKA

AND THE DEPENDENT RESURVEY
OF PORTIONS OF
U.S. Survey Nos. 1537, 3139, 3159, 3529, and 4877

HISTORY OF SURVEYS

A dependent resurvey of a portion of U.S. Survey No. 537; the survey of the Third Standard Parallel South along the south boundary of Township 12 South through Range 45 West, the Eleventh Guide Meridian West through Township 12 South between Ranges 44 and 45 West, the partition line of accreted lands attached to U.S. Survey No. 537 and meanders of Township 12 South, Range 45 West, Seward Meridian, Alaska, was surveyed by Timothy A. Kent, Richard T. Helm III, and Paul J. Hickey, Cadastral Surveyors, in 1978-86.

The south and east boundaries; a portion of the subdivisional lines; and meanders of Township 11 South, Range 44 West, Seward Meridian, Alaska, was surveyed by Timothy A. Kent, Richard T. Helm III, and Paul J. Hickey, Cadastral Surveyors, in 1978-86.


U.S. Survey No. 3139 was surveyed by Jack C. Means, Cadastral Engineer, in 1952.

U.S. Survey No. 3193 contiguous with U.S. Survey No. 3139, was surveyed by Jack C. Means, Cadastral Engineer, in 1952.

U.S. Survey No. 3529 contiguous with U.S. Survey Nos. 3139 and 3193, was surveyed by Walter W. Cooley, Cartographic Survey Aid, in 1957.

U.S. Survey No. 4877, Levelock Townsite contiguous with U.S. Survey Nos. 3139 and 3529, was surveyed by Edward D. Conklin, Supervisory Cadastral Surveyor, in 1967.

REFERENCE SHOULD BE MADE
TO SHEETS NO. 1, 6, AND 7 FOR
ADDITIONAL SURVEY INFORMATION.



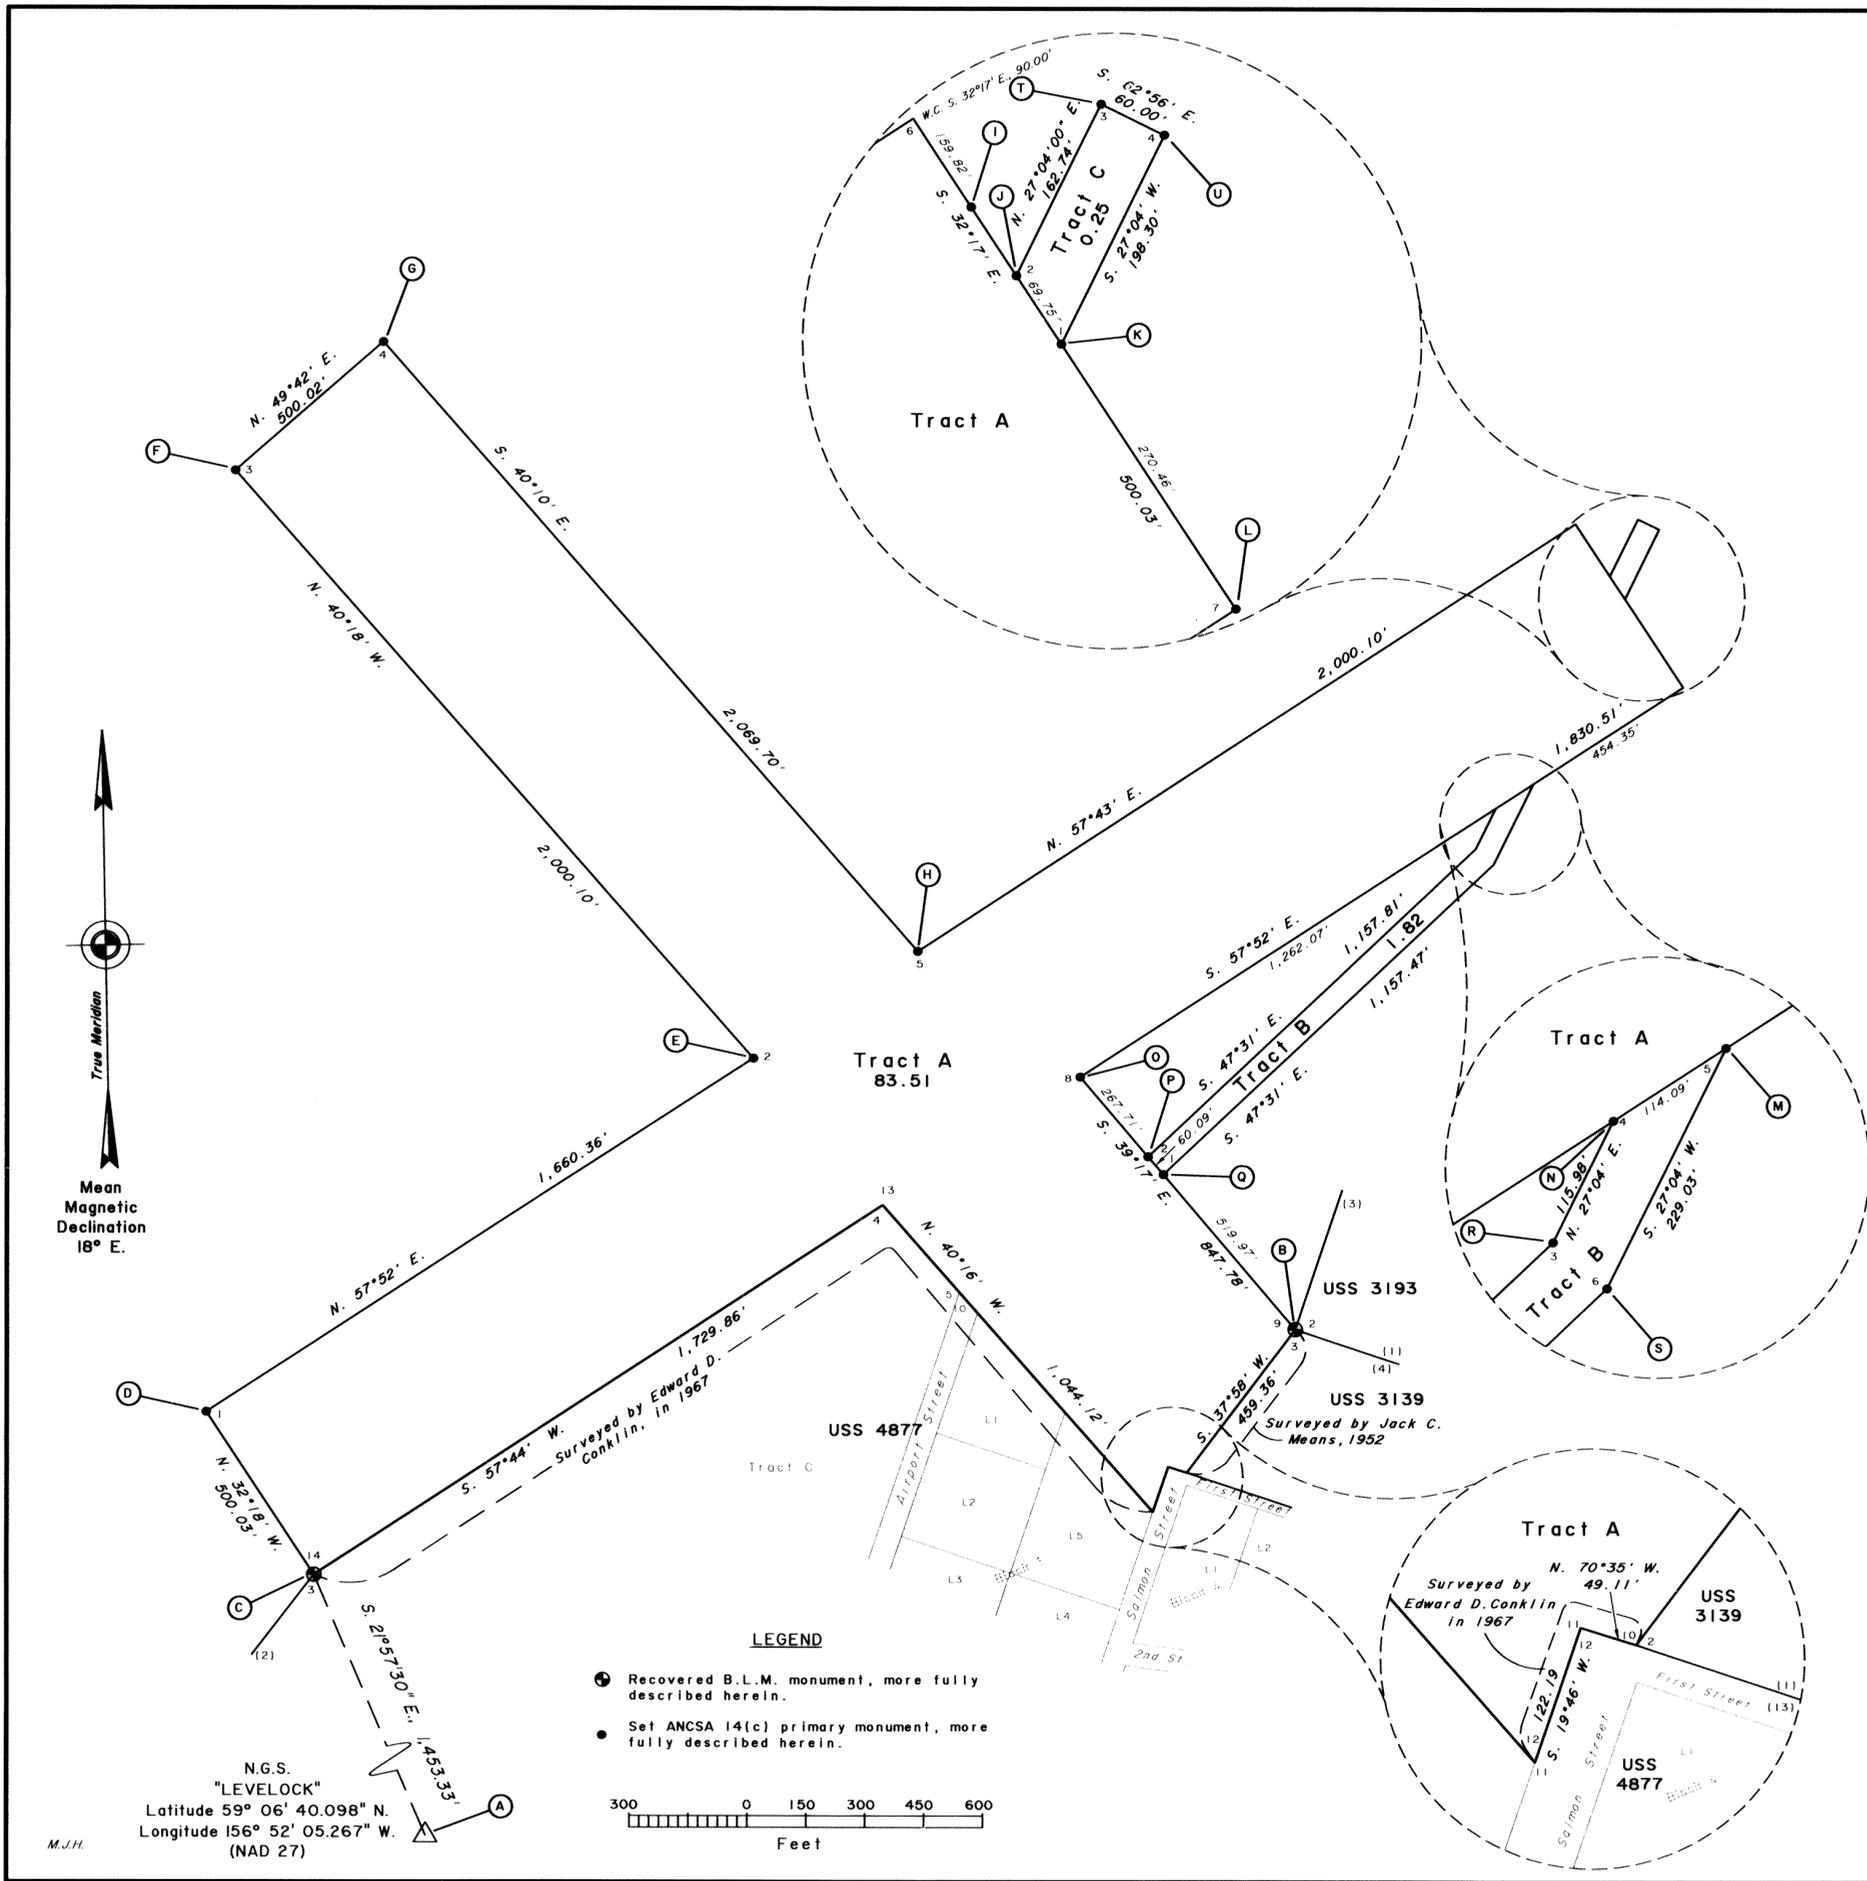


Koichak Recording District 2004-1


ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14(c), TRACTS A THROUGH K; THE SUBDIVISION OF LOT 8, U.S. SURVEY 3529; AND THE SUBDIVISION OF TRACT B, U.S. SURVEY 4877, P.L. 92-203 (85 STAT. 688, 702, 703)

LEVELOCK NATIVES, LIMITED AT LEVELOCK, ALASKA

N.G.S. "LEVELOCK" Latitude 59° 06' 40.098" N. Longitude 156° 52' 05.267" W. (NAD 27)

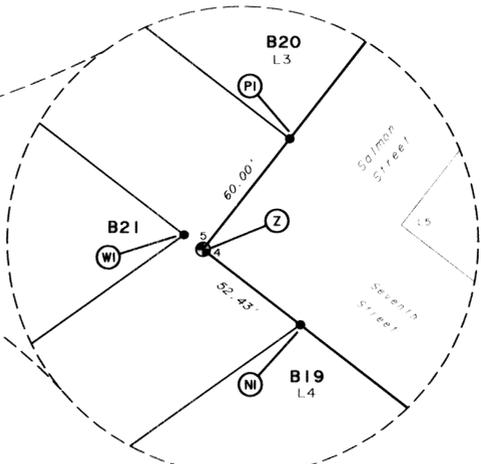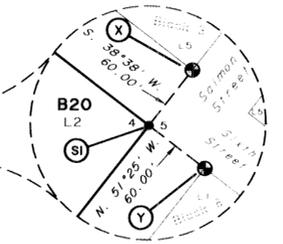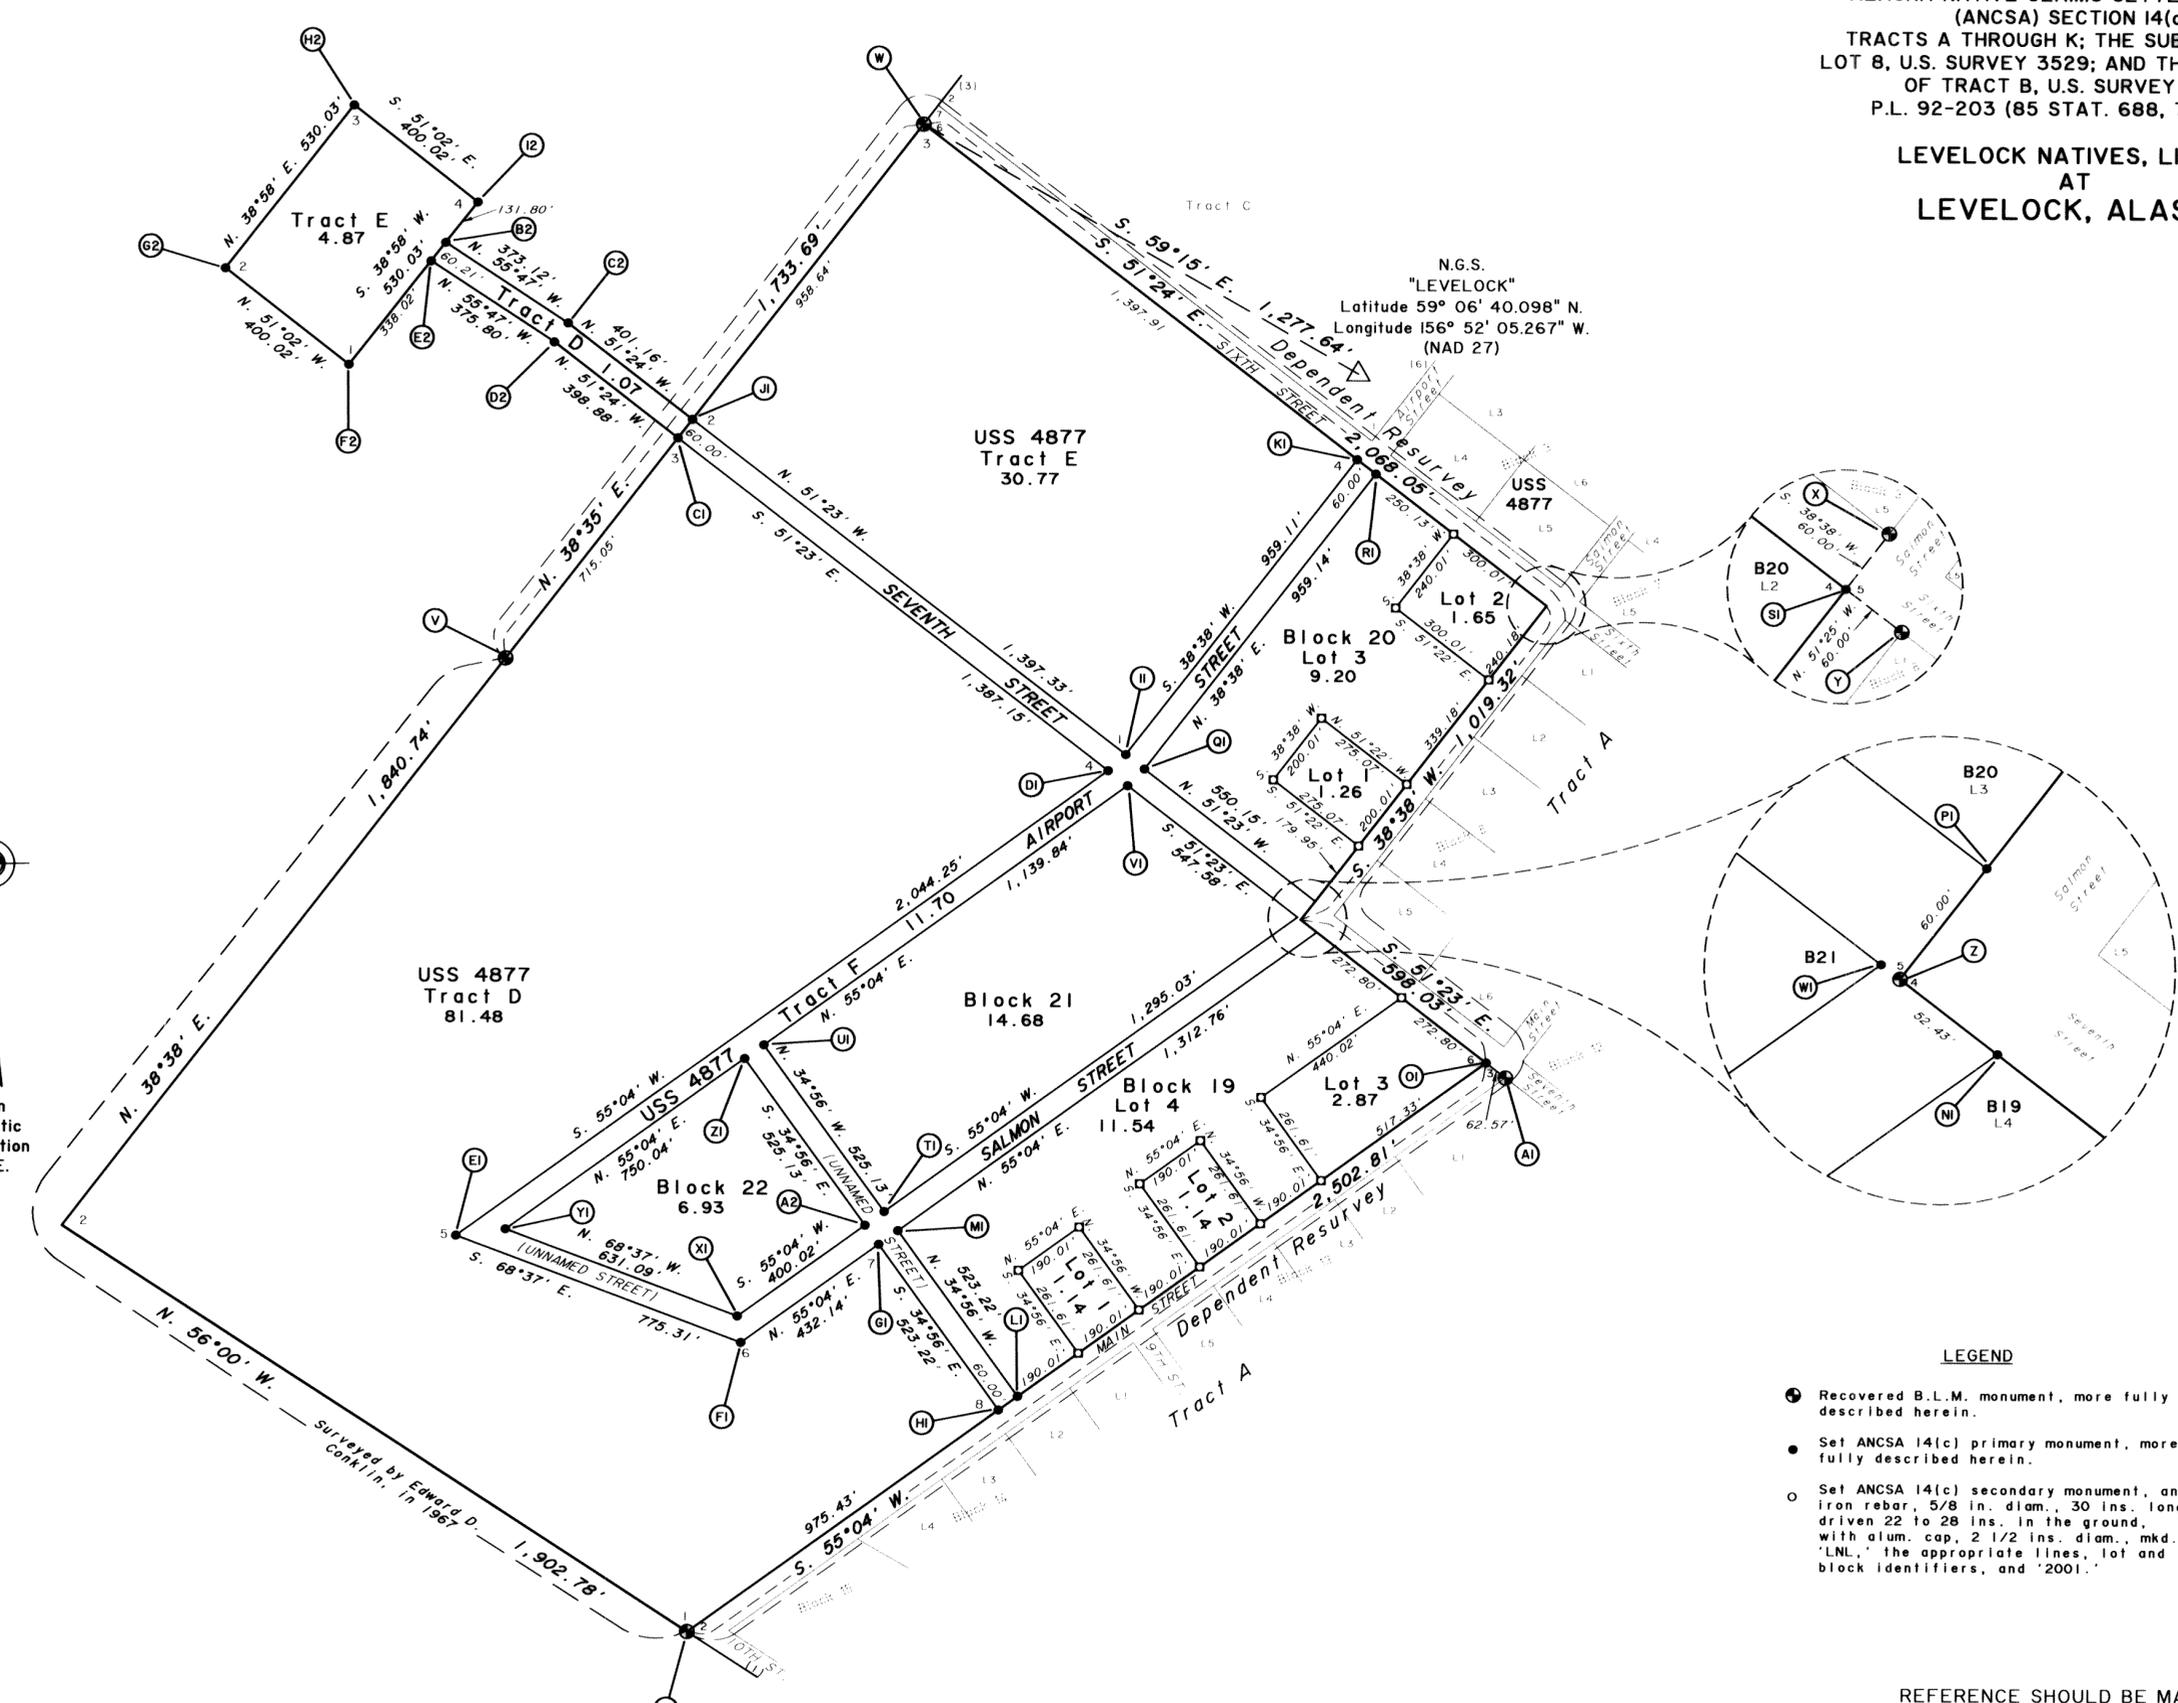

- LEGEND**
- Recovered B.L.M. monument, more fully described herein.
 - Set ANCSA 14(c) primary monument, more fully described herein.
 - Set ANCSA 14(c) secondary monument, an iron rebar, 5/8 in. diam., 30 ins. long, driven 22 to 28 ins. in the ground, with alum. cap, 2 1/2 ins. diam., mkd. "LNL," the appropriate lines, lot and block identifiers, and "2001."



REFERENCE SHOULD BE MADE TO SHEETS NO. 1, 2, 7, 8, AND 9 FOR ADDITIONAL SURVEY INFORMATION.

Kuichak Recording District 2004-1


ALASKA NATIVE CLAIMS SETTLEMENT ACT
(ANCSA) SECTION 14(c),
TRACTS A THROUGH K; THE SUBDIVISION OF
LOT 8, U.S. SURVEY 3529; AND THE SUBDIVISION
OF TRACT B, U.S. SURVEY 4877,
P.L. 92-203 (85 STAT. 688, 702, 703)

LEVELOCK NATIVES, LIMITED
AT
LEVELOCK, ALASKA

**TRACT I
MEANDERS**

Along a well-defined grass and
silt bank, 2 to 5 ft. high, at
the line of ordinary high water.


1. N. 85°18' W., 56.00 ft.
2. S. 87°42' W., 95.85 ft.
3. S. 76°57' W., 57.56 ft.

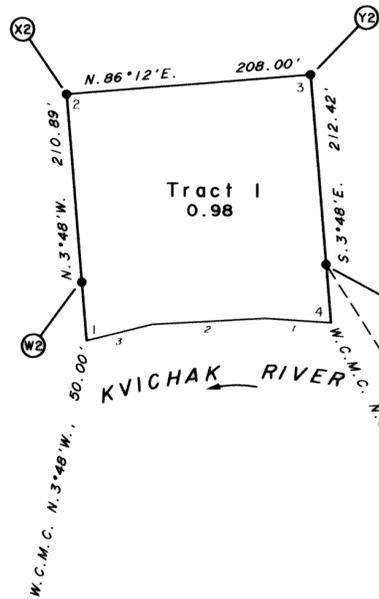

**TRACT G
MEANDERS**

Along a well-defined grass and
silt bank, 2 to 5 ft. high, at
the line of ordinary high water.


1. S. 39°29' W., 55.44 ft.
2. S. 41°29' W., 91.87 ft.
3. S. 50°29' W., 107.01 ft.
4. S. 53°14' W., 97.23 ft.
5. S. 67°59' W., 71.25 ft.

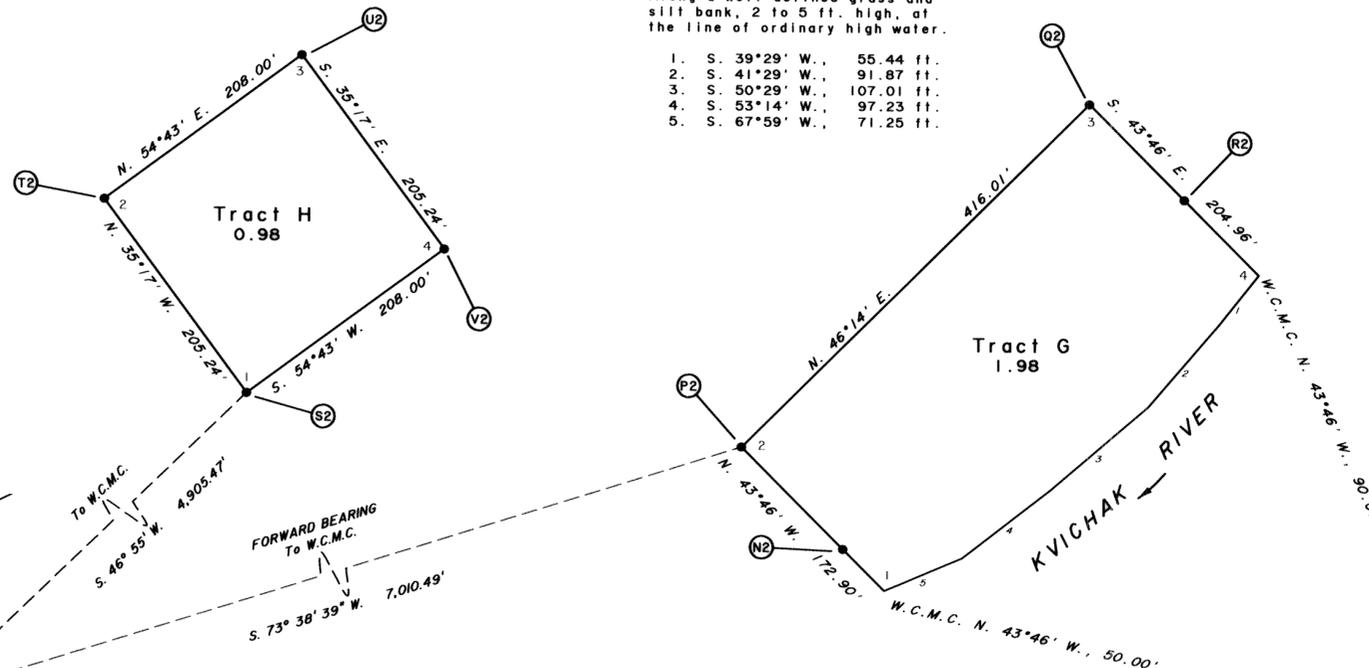


**TRACT F
MEANDERS**

Along a well-defined grass and
silt bank, 2 to 5 ft. high, at
the line of ordinary high water.

1. N. 80°56' W., 125.00 ft.
2. N. 73°27' W., 221.10 ft.
3. N. 61°42' W., 72.49 ft.

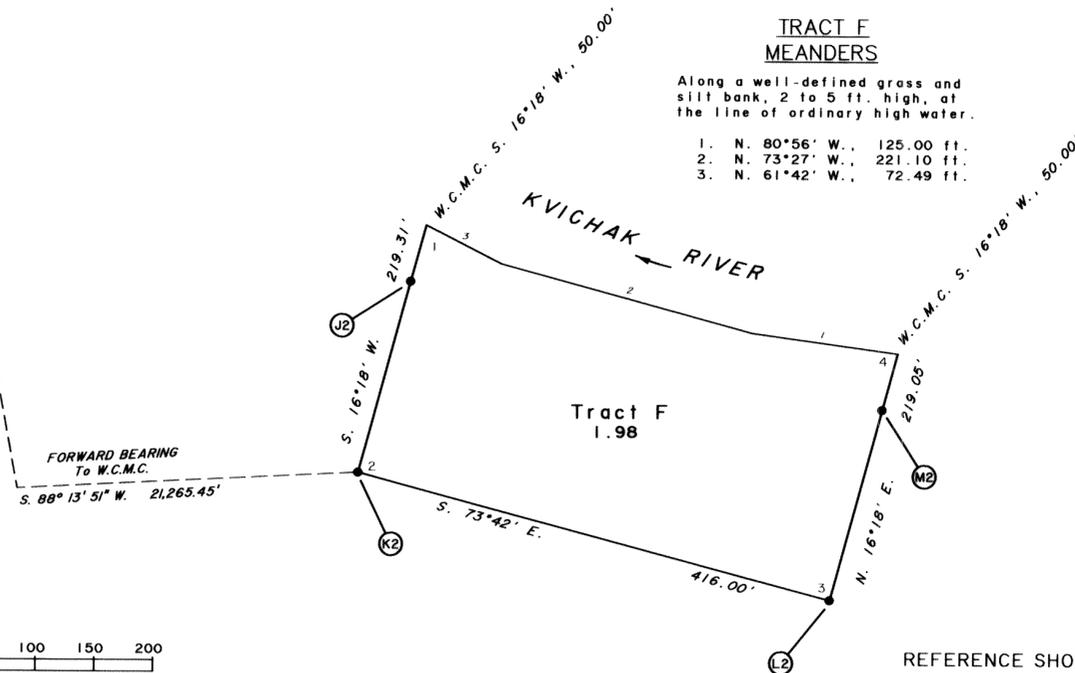

Latitude 59° 12' 27.750" N.
Longitude 156° 35' 57.720" W.
(NAD 27)
The W.C.M.C. common to Sec. 19,
T. II S., R. 43 W., and Sec. 24,
T. II S., R. 44 W., Seward
Meridian, Alaska




Found an alum. post, 2 1/2 in. diam.,
firmly set, projecting 12 ins. above the
ground, with alum. cap mkd. as shown,
from which

A spruce, 5 ins. diam., bears S. 34° E.,
85.8 ft. dist., mkd. X BT.

A spruce, 7 ins. diam., bears S. 62° W.,
38.3 ft. dist., mkd. X BT.

LEGEND

- ⊕ Recovered B.L.M. monument, more fully described herein.
- Set ANCSA 14(c) primary monument, more fully described herein.




REFERENCE SHOULD BE MADE
TO SHEETS NO. 1, 2, 9, AND 10 FOR
ADDITIONAL SURVEY INFORMATION.

Kvichak Recording District 2004-1

ALASKA NATIVE CLAIMS SETTLEMENT ACT (ANCSA) SECTION 14(c), TRACTS A THROUGH K; THE SUBDIVISION OF LOT 8, U.S. SURVEY 3529; AND THE SUBDIVISION OF TRACT B, U.S. SURVEY 4877, P.L. 92-203 (85 STAT. 688, 702, 703)

LEVELOCK NATIVES, LIMITED AT LEVELOCK, ALASKA

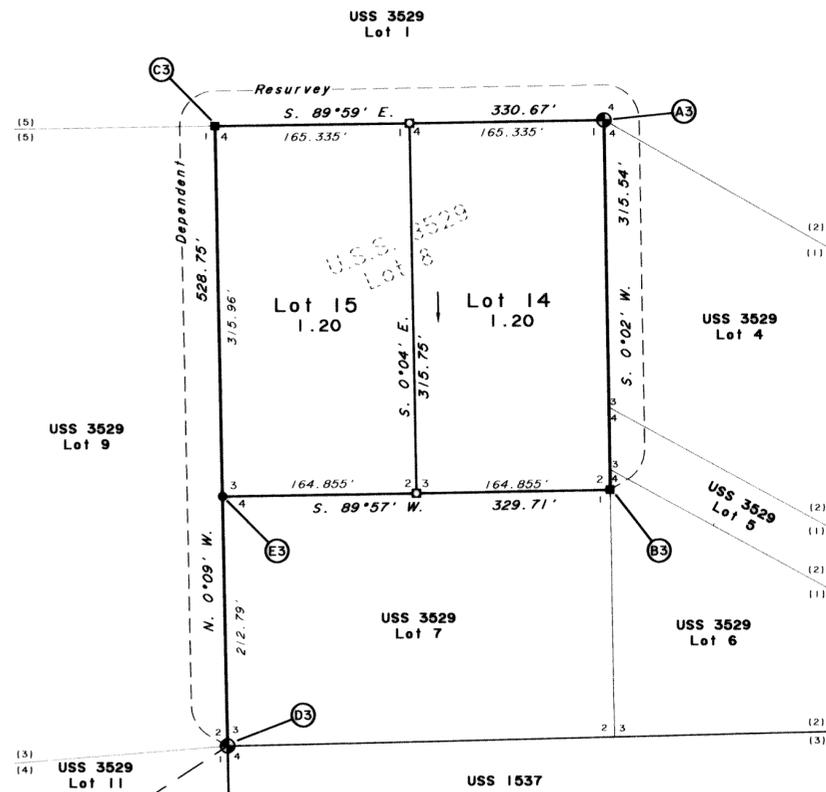


N.G.S.
"LEVELOCK"
Latitude 59° 06' 40.098" N.
Longitude 156° 52' 05.267" W.
(NAD 27)




LEGEND


- Recovered B.L.M. monument, more fully described herein.
- Recovered B.L.M. wooden 2x2 hub, remonumented with ANCSA 14(c) primary monument, more fully described herein.
- Set ANCSA 14(c) primary monument, more fully described herein.
- Set ANCSA 14(c) secondary monument, an iron rebar, 5/8 in. diam., 30 ins. long, driven 22 to 28 ins. in the ground, with alum. cap, 2 1/2 ins. diam., mkd. "LNL," the appropriate lines, lot and block identifiers, and "2001."



M.J.H.

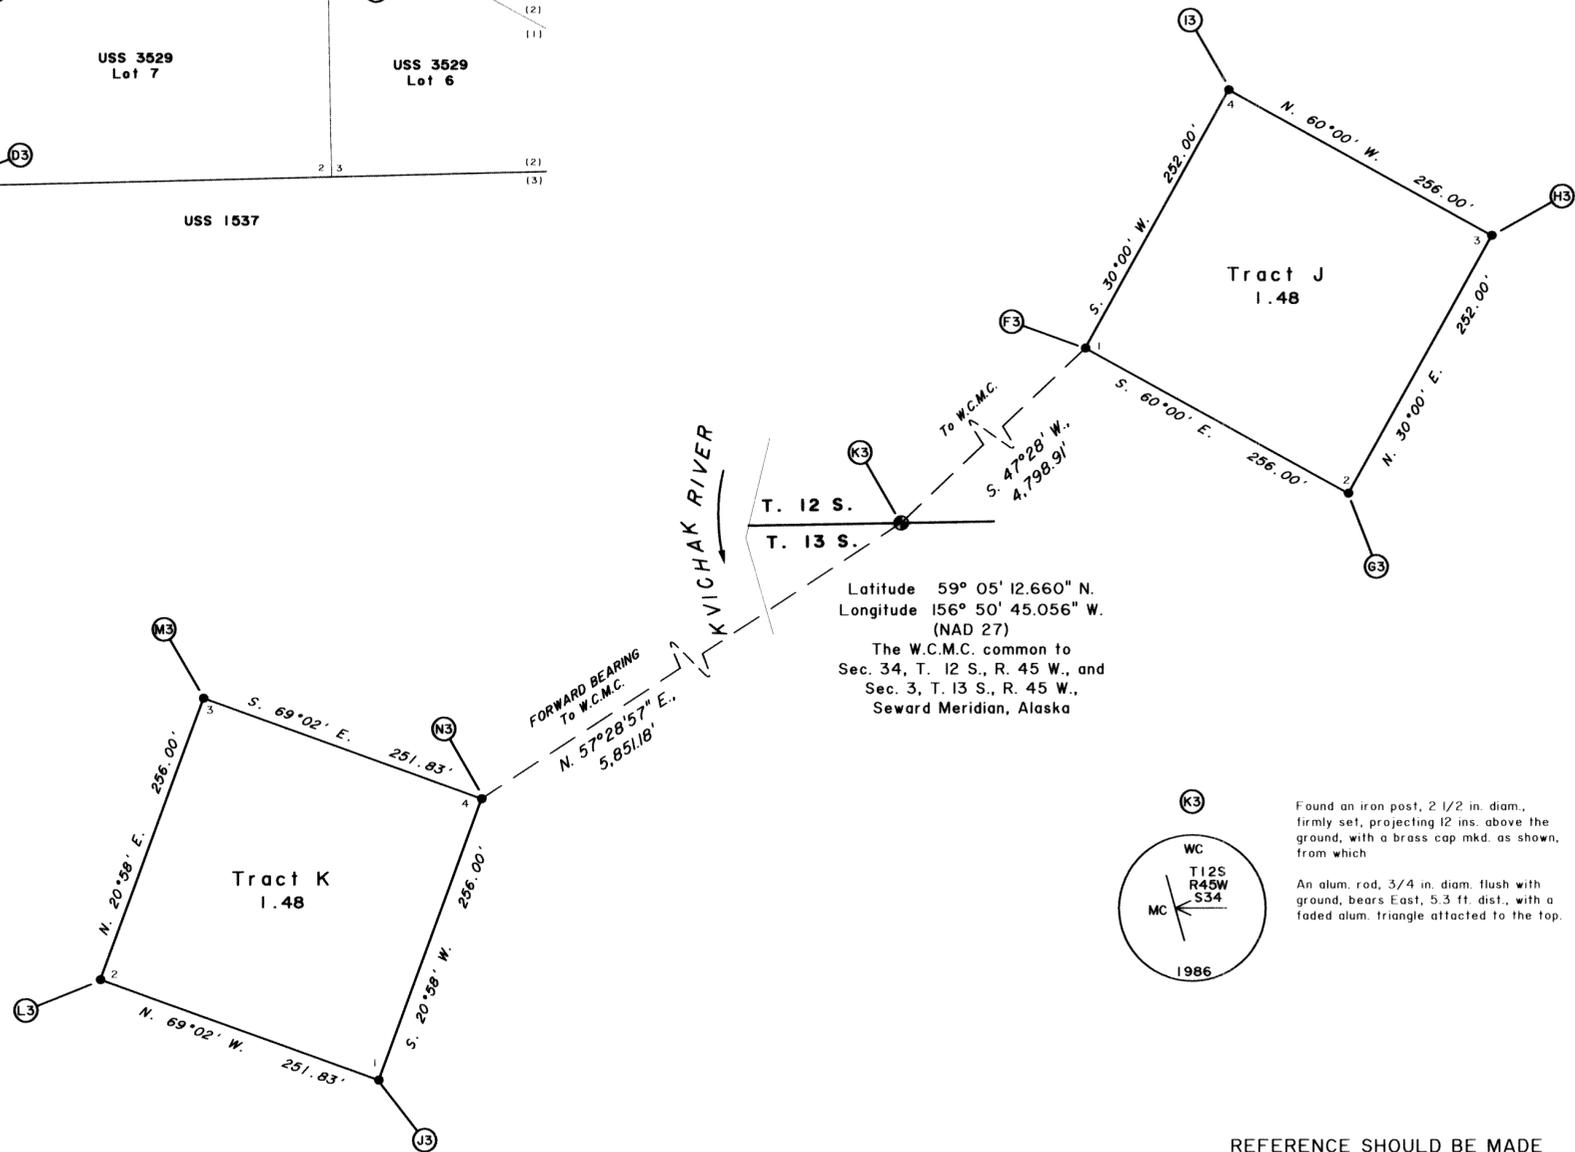

Latitude 59° 05' 12.660" N.
Longitude 156° 50' 45.056" W.
(NAD 27)
The W.C.M.C. common to
Sec. 34, T. 12 S., R. 45 W., and
Sec. 3, T. 13 S., R. 45 W.,
Seward Meridian, Alaska




Found an iron post, 2 1/2 in. diam., firmly set, projecting 12 ins. above the ground, with a brass cap mkd. as shown, from which
An alum. rod, 3/4 in. diam. flush with ground, bears East, 5.3 ft. dist., with a faded alum. triangle attached to the top.

REFERENCE SHOULD BE MADE TO SHEETS NO. 1, 2, AND 10 FOR ADDITIONAL SURVEY INFORMATION.

Kovichak Recording District 2004-1

ALASKA NATIVE CLAIMS SETTLEMENT ACT
(ANCSA) SECTION 14(c),
TRACTS A THROUGH K; THE SUBDIVISION OF
LOT 8, U.S. SURVEY 3529; AND THE SUBDIVISION
OF TRACT B, U.S. SURVEY 4877,
P.L. 92-203 (85 STAT. 688, 702, 703)


LEVELOCK NATIVES, LIMITED
AT
LEVELOCK, ALASKA



Found an iron pipe, 2 1/2 ins. in diam., firmly set, projecting 1 in. above the ground, with a bronze cap mkd. as shown, from which

An iron pipe, 2 1/2 ins. in diam., firmly set projecting 6 ins. above ground, with a bronze cap mkd. "LEVELOCK NO 1, 1946", bears S. 58°10' E., 42.33 ft. dist.


"LEVELOCK NO 2" was not located.



Found an iron pipe, 2 1/2 ins. diam., firmly set, 15 ins. below the ground, with a brass cap mkd. as shown

There is no remaining evidence of the original bearing trees.


No new accessories taken.



Found a galv. iron pipe, 2 1/2 ins. diam., firmly set, projecting 4 ins. above the ground, with a brass cap mkd. as shown.

There is no remaining evidence of the original bearing trees.

No new accessories taken.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd. as shown, from which

A magnet, in a metallic silver plastic case, bears N. 45° E., 10 ft. dist., buried 18 ins. below ground.

A magnet, in a fluorescent pink plastic case, bears S. 45° E., 10 ft. dist., buried 18 ins. below ground.

Deposit a magnet, in a clear plastic case, at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd. as shown, from which

A magnet, in a fluorescent blue plastic case, bears S. 45° W., 10 ft. dist., buried 18 ins. below ground.

A magnet, in a fluorescent orange plastic case, bears N. 45° W., 10 ft. dist., buried 18 ins. below ground.

A spruce, 8 ins. diam., bears N. 28° W., 25.4 ft. dist., mkd. X BT.

Deposit a magnet, in a clear plastic case, at the base of the stainless steel post.



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown, from which

A spruce, 7 ins. diam., bears N. 68° E., 37.8 ft. dist., mkd. X BT.

A spruce, 9 ins. diam., bears S. 18° E., 18.4 ft. dist., mkd. X BT.

Deposit a magnet, in a clear plastic case, at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown, from which

A magnet, in a metallic silver plastic case, bears N. 45° E., 10 ft. dist., buried 18 ins. below ground.

A magnet, in a fluorescent pink plastic case, bears S. 45° E., 10 ft. dist., buried 18 ins. below ground.

Deposit a magnet, in a clear plastic case, at the base of the stainless steel post.



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd. as shown, from which

A magnet, in a metallic silver plastic case, bears N. 45° E., 10 ft. dist., buried 18 ins. below ground.

A magnet, in a fluorescent orange plastic case, bears S. 45° W., 10 ft. dist., buried 18 ins. below ground.

Deposit a magnet, in a clear plastic case, at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown, from which

A magnet, in a fluorescent pink plastic case, bears S. 45° E., 10 ft. dist., buried 18 ins. below ground.

A magnet, in a fluorescent blue plastic case, bears S. 45° W., 10 ft. dist., buried 18 ins. below ground.

Deposit a magnet, in a clear plastic case, at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown, from which

A magnet, in a metallic silver plastic case, bears N. 45° E., 10 ft. dist., buried 18 ins. below ground.

A magnet, in a fluorescent orange plastic case, bears N. 45° W., 10 ft. dist., buried 18 ins. below ground.

Deposit a magnet, in a clear plastic case, at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd. as shown, from which

A magnet, in a metallic silver plastic case, bears N. 45° E., 10 ft. dist., buried 18 ins. below ground.

A magnet, in a fluorescent orange plastic case, bears N. 45° W., 10 ft. dist., buried 18 ins. below ground.

Deposit a magnet, in a clear plastic case, at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd. as shown, from which

A magnet, in a fluorescent blue plastic case, bears S. 45° W., 10 ft. dist., buried 18 ins. below ground.

A magnet, in a fluorescent orange plastic case, bears N. 45° W., 10 ft. dist., buried 18 ins. below ground.

Deposit a magnet, in a clear plastic case, at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 30 ins. in the ground, with brass cap mkd. as shown, from which

A magnet, in a fluorescent pink plastic case, bears S. 45° E., 10 ft. dist., buried 18 ins. below ground.

A magnet, in a fluorescent blue plastic case, bears S. 45° W., 10 ft. dist., buried 18 ins. below ground.

Deposit a magnet, in a clear plastic case, at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with brass cap mkd. as shown, from which

A magnet, in a fluorescent pink plastic case, bears S. 45° E., 10 ft. dist., buried 18 ins. below ground.

A magnet, in a fluorescent blue plastic case, bears S. 45° W., 10 ft. dist., buried 18 ins. below ground.

Deposit a magnet, in a clear plastic case, at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd. as shown, from which

A spruce, 5 ins. diam., bears S. 78° E., 21.4 ft. dist., mkd. X BT.

A spruce, 5 ins. diam., bears N. 9° W., 15.8 ft. dist., mkd. X BT.

Deposit a magnet, in a clear plastic case, at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 29 ins. in the ground, with brass cap mkd. as shown, from which

A magnet, in a metallic silver plastic case, bears N. 45° E., 10 ft. dist., buried 18 ins. below ground.

A magnet, in a fluorescent pink plastic case, bears S. 45° E., 10 ft. dist., buried 18 ins. below ground.

Deposit a magnet, in a clear plastic case, at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which

A magnet, in a metallic silver plastic case, bears N. 45° E., 10 ft. dist., buried 18 ins. below ground.

A magnet, in a fluorescent orange plastic case, bears N. 45° W., 10 ft. dist., buried 18 ins. below ground.

Deposit a magnet, in a clear plastic case, at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown, from which

A magnet, in a metallic silver plastic case, bears N. 45° E., 10 ft. dist., buried 18 ins. below ground.

A magnet, in a fluorescent orange plastic case, bears N. 45° W., 10 ft. dist., buried 18 ins. below ground.

Deposit a magnet, in a clear plastic case, at the base of the stainless steel post.



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with brass cap mkd. as shown, from which


A magnet, in a metallic silver plastic case, bears N. 45° E., 10 ft. dist., buried 18 ins. below ground.

A magnet, in a fluorescent orange plastic case, bears N. 45° W., 10 ft. dist., buried 18 ins. below ground.

Deposit a magnet, in a clear plastic case, at the base of the stainless steel post.

ALASKA NATIVE CLAIMS SETTLEMENT ACT
(ANCSA) SECTION 14(c),
TRACTS A THROUGH K; THE SUBDIVISION OF
LOT 8, U.S. SURVEY 3529; AND THE SUBDIVISION
OF TRACT B, U.S. SURVEY 4877,
P.L. 92-203 (85 STAT. 688, 702, 703)

LEVELOCK NATIVES, LIMITED
AT
LEVELOCK, ALASKA




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd. as shown, from which

A magnet, in a fluorescent pink plastic case, bears S. 45° E., 10 ft. dist., buried 18 ins. below ground.

A magnet, in a fluorescent blue plastic case, bears S. 45° W., 10 ft. dist., buried 18 ins. below ground.

Deposit a magnet, in a clear plastic case, at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown, from which

A magnet, in a fluorescent pink plastic case, bears S. 45° E., 10 ft. dist., buried 18 ins. below ground.


A magnet, in a fluorescent blue plastic case, bears S. 45° W., 10 ft. dist., buried 18 ins. below ground.

Deposit a magnet, in a clear plastic case, at the base of the stainless steel post.




Found an iron post, 2 1/2 ins. diam., firmly set, projecting 6 ins. above the ground, with a brass cap mkd. as shown, from which;

Original pits were not discernible, no new accessories taken.




Found a copperweld rod, 3/4 in. diam., firmly set, projecting 5 ins. above the ground, with a 2 in. diam. copper cap mkd. as shown, from which;

There are no original accessories, and no new accessories taken.




Found a copperweld rod, 3/4 in. diam., firmly set, projecting 4 ins. above the ground, with a 2 in. diam. copper cap mkd. as shown, from which;

There are no original accessories, and no new accessories taken.




Found a copperweld rod, 3/4 in. diam., firmly set, flush with the ground, with a 2 in. diam. copper cap mkd. as shown, from which;

There are no original accessories, and no new accessories taken.




Found a copperweld rod, 3/4 in. diam., firmly set, 36 ins. below the surface, with a 2 in. diam. copper cap mkd. as shown, from which;

There are no original accessories, and no new accessories taken.




Found a copperweld rod, 3/4 in. diam., firmly set, 2 ins. below the surface, cap is missing, from which;

There are no original accessories, and no new accessories taken.



Found a copperweld rod, 3/4 in. diam., firmly set, 8 ins. above the ground, with a 2 in. diam. copper cap mkd. as shown, from which;

There are no original accessories, and no new accessories taken.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown, from which

A magnet, in a fluorescent pink plastic case, bears S. 45° E., 10 ft. dist., buried 18 ins. below ground.

A magnet, in a fluorescent blue plastic case, bears S. 45° W., 10 ft. dist., buried 18 ins. below ground.

Deposit a magnet, in a clear plastic case, at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown, from which

A magnet, in a fluorescent pink plastic case, bears S. 45° E., 10 ft. dist., buried 18 ins. below ground.

A magnet, in a fluorescent blue plastic case, bears S. 45° W., 10 ft. dist., buried 18 ins. below ground.

Deposit a magnet, in a clear plastic case, at the base of the stainless steel post.



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown, from which

A magnet, in a fluorescent pink plastic case, bears S. 45° E., 10 ft. dist., buried 18 ins. below ground.

A magnet, in a fluorescent orange plastic case, bears N. 45° W., 10 ft. dist., buried 18 ins. below ground.

Deposit a magnet, in a clear plastic case, at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown, from which

A magnet, in a fluorescent pink plastic case, bears S. 45° E., 10 ft. dist., buried 18 ins. below ground.

A magnet, in a fluorescent blue plastic case, bears S. 45° W., 10 ft. dist., buried 18 ins. below ground.

Deposit a magnet, in a clear plastic case, at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd. as shown, from which

A magnet, in a fluorescent pink plastic case, bears S. 45° E., 10 ft. dist., buried 18 ins. below ground.

A magnet, in a fluorescent blue plastic case, bears S. 45° W., 10 ft. dist., buried 18 ins. below ground.

A spruce, 6 ins. diam., bears S. 73° W., 20.7 ft. dist., mkd. X BT.

Deposit a magnet, in a clear plastic case, at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd. as shown, from which

A magnet, in a fluorescent blue plastic case, bears S. 45° W., 10 ft. dist., buried 18 ins. below ground.

A magnet, in a fluorescent orange plastic case, bears N. 45° W., 10 ft. dist., buried 18 ins. below ground.

Deposit a magnet, in a clear plastic case, at the base of the stainless steel post.



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown, from which

A magnet, in a metallic silver plastic case, bears N. 45° E., 10 ft. dist., buried 18 ins. below ground.

A magnet, in a fluorescent orange plastic case, bears N. 45° W., 10 ft. dist., buried 18 ins. below ground.

Deposit a magnet, in a clear plastic case, at the base of the stainless steel post.



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd. as shown, from which

A magnet, in a metallic silver plastic case, bears N. 45° E., 10 ft. dist., buried 18 ins. below ground.

A magnet, in a fluorescent orange plastic case, bears N. 45° W., 10 ft. dist., buried 18 ins. below ground.

Deposit a magnet, in a clear plastic case, at the base of the stainless steel post.



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd. as shown, from which

A magnet, in a metallic silver plastic case, bears N. 45° E., 10 ft. dist., buried 18 ins. below ground.

A magnet, in a fluorescent orange plastic case, bears N. 45° W., 10 ft. dist., buried 18 ins. below ground.

Deposit a magnet, in a clear plastic case, at the base of the stainless steel post.



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown, from which

A magnet, in a metallic silver plastic case, bears N. 45° E., 10 ft. dist., buried 18 ins. below ground.

A magnet, in a fluorescent orange plastic case, bears N. 45° W., 10 ft. dist., buried 18 ins. below ground.

Deposit a magnet, in a clear plastic case, at the base of the stainless steel post.

ALASKA NATIVE CLAIMS SETTLEMENT ACT
(ANCSA) SECTION 14(c),
TRACTS A THROUGH K; THE SUBDIVISION
OF TRACT B, U.S. SURVEY 4877,
P.L. 92-203 (85 STAT. 688, 702, 703)

LEVELOCK NATIVES, LIMITED
AT
LEVELOCK, ALASKA




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown, from which

A magnet, in a metallic silver plastic case, bears N. 45° E., 10 ft. dist., buried 18 ins. below ground.

A magnet, in a fluorescent orange plastic case, bears N. 45° W., 10 ft. dist., buried 18 ins. below ground.

Deposit a magnet, in a clear plastic case, at the base of the stainless steel post.



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown, from which

A magnet, in a metallic silver plastic case, bears N. 45° E., 10 ft. dist., buried 18 ins. below ground.

A magnet, in a fluorescent pink plastic case, bears S. 45° E., 10 ft. dist., buried 18 ins. below ground.

Deposit a magnet, in a clear plastic case, at the base of the stainless steel post.



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown, from which

A magnet, in a fluorescent pink plastic case, bears S. 45° E., 10 ft. dist., buried 18 ins. below ground.

A magnet, in a fluorescent blue plastic case, bears S. 45° W., 10 ft. dist., buried 18 ins. below ground.

Deposit a magnet, in a clear plastic case, at the base of the stainless steel post.



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown, from which

A magnet, in a fluorescent blue plastic case, bears S. 45° W., 10 ft. dist., buried 18 ins. below ground.

A magnet, in a fluorescent orange plastic case, bears N. 45° W., 10 ft. dist., buried 18 ins. below ground.

Deposit a magnet, in a clear plastic case, at the base of the stainless steel post.



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd. as shown, from which

A magnet, in a fluorescent pink plastic case, bears S. 45° E., 10 ft. dist., buried 18 ins. below ground.

A magnet, in a fluorescent blue plastic case, bears S. 45° W., 10 ft. dist., buried 18 ins. below ground.

Deposit a magnet, in a clear plastic case, at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd. as shown, from which

A magnet, in a metallic silver plastic case, bears N. 45° E., 10 ft. dist., buried 18 ins. below ground.

A magnet, in a fluorescent pink plastic case, bears S. 45° E., 10 ft. dist., buried 18 ins. below ground.

Deposit a magnet, in a clear plastic case, at the base of the stainless steel post.



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd. as shown, from which

A magnet, in a metallic silver plastic case, bears N. 45° E., 10 ft. dist., buried 18 ins. below ground.

A magnet, in a fluorescent orange plastic case, bears N. 45° W., 10 ft. dist., buried 18 ins. below ground.

Deposit a magnet, in a clear plastic case, at the base of the stainless steel post.



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown, from which

A magnet, in a fluorescent pink plastic case, bears S. 45° E., 10 ft. dist., buried 18 ins. below ground.

A magnet, in a fluorescent blue plastic case, bears S. 45° W., 10 ft. dist., buried 18 ins. below ground.

Deposit a magnet, in a clear plastic case, at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd. as shown, from which

A spruce, 4 ins. diam., bears N. 12° E., 19.7 ft. dist., mkd. X BT.

A spruce, 5 ins. diam., bears N. 72° W., 85.5 ft. dist., mkd. X BT.

Deposit a magnet, in a clear plastic case, at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd. as shown, from which

A spruce, 7 ins. diam., bears S. 72° E., 23.1 ft. dist., mkd. X BT.

A spruce, 4 ins. diam., bears S. 52° W., 12.1 ft. dist., mkd. X BT.

Deposit a magnet, in a clear plastic case, at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown, from which

A spruce, 10 ins. diam., bears N. 72° E., 48.4 ft. dist., mkd. X BT.

A birch, 6 ins. diam., bears S. 10° E., 19.3 ft. dist., mkd. X BT.

Deposit a magnet, in a clear plastic case, at the base of the stainless steel post.



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown, from which

A spruce, 9 ins. diam., bears S. 54° W., 33.5 ft. dist., mkd. X BT.

A birch, 7 ins. diam., bears N. 10° W., 24.2 ft. dist., mkd. X BT.

Deposit a magnet, in a clear plastic case, at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd. as shown, from which

A magnet, in a metallic silver plastic case, bears N. 45° E., 10 ft. dist., buried 18 ins. below ground.

A magnet, in a fluorescent pink plastic case, bears S. 45° E., 10 ft. dist., buried 18 ins. below ground.

Deposit a magnet, in a clear plastic case, at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown, from which

A spruce, 7 ins. diam., bears N. 60° E., 22.0 ft. dist., mkd. X BT.

A spruce, 7 ins. diam., bears N. 46° W., 53.2 ft. dist., mkd. X BT.

Deposit a magnet, in a clear plastic case, at the base of the stainless steel post.



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown, from which

A spruce, 6 ins. diam., bears N. 20° E., 16.8 ft. dist., mkd. X BT.

A magnet, in a metallic silver plastic case, bears N. 45° E., 10 ft. dist., buried 18 ins. below ground.

A magnet, in a fluorescent pink plastic case, bears S. 45° E., 10 ft. dist., buried 18 ins. below ground.

A spruce, 8 ins. diam., bears N. 16° W., 21.5 ft. dist., mkd. X BT.

Deposit a magnet, in a clear plastic case, at the base of the stainless steel post.



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown, from which

A magnet, in a fluorescent blue plastic case, bears S. 45° W., 10 ft. dist., buried 18 ins. below ground.

A magnet, in a fluorescent orange plastic case, bears N. 45° W., 10 ft. dist., buried 18 ins. below ground.

Deposit a magnet, in a clear plastic case, at the base of the stainless steel post.



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd. as shown, from which

A spruce, 4 ins. diam., bears N. 10° E., 30.6 ft. dist., mkd. X BT.

A spruce, 8 ins. diam., bears N. 64° W., 23.7 ft. dist., mkd. X BT.

Deposit a magnet, in a clear plastic case, at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd. as shown, from which

A spruce, 5 ins. diam., bears N. 20° E., 21.0 ft. dist., mkd. X BT.

A spruce, 5 ins. diam., bears S. 20° E., 23.8 ft. dist., mkd. X BT.

Deposit a magnet, in a clear plastic case, at the base of the stainless steel post.



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd. as shown, from which


A spruce, 8 ins. diam., bears S. 22° E., 32.5 ft. dist., mkd. X BT.

A spruce, 7 ins. diam., bears S. 52° W., 45.1 ft. dist., mkd. X BT.


Deposit a magnet, in a clear plastic case, at the base of the stainless steel post.

ALASKA NATIVE CLAIMS SETTLEMENT ACT
(ANCSA) SECTION 14(c),
TRACTS A THROUGH K; THE SUBDIVISION
OF TRACT B, U.S. SURVEY 4877,
P.L. 92-203 (85 STAT. 688, 702, 703)

LEVELOCK NATIVES, LIMITED
AT
LEVELOCK, ALASKA



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown, from which
A spruce, 5 ins. diam., bears N. 82° W., 13.0 ft. dist., mkd. X BT.
A spruce, 5 ins. diam., bears N. 18° W., 25.6 ft. dist., mkd. X BT.
Deposit a magnet, in a clear plastic case, at the base of the stainless steel post.




Found an iron post, 2 1/2 ins. diam., firmly set, projecting 2 in. above the ground, with a brass cap mkd. as shown, from which;
A pit, 18 ins. by 18 ins. by 12 ins. deep, bears southeast, 3 ft. dist.
A pit, 18 ins. by 18 ins. by 12 ins. deep, bears south, 3 ft. dist.
The pit to East was not discernible.
No new accessories taken.



Found a rotted wood hub, 2 in. by 2 in., firmly set, 2 ins. below the surface, set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown, from which
A spruce, 8 ins. diam., bears S. 83° W., 22.2 ft. dist., mkd. X BT.
A spruce, 11 ins. diam., bears N. 27° W., 32.0 ft. dist., mkd. X BT.
Deposit a magnet, in a clear plastic case, at the base of the stainless steel post.
Buried the 2 in. by 2 in. hub upside-down next to the monument.



Found a rotted wood hub, 2 in. by 2 in., firmly set, 6 ins. below the surface, set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd. as shown, from which
A magnet, in a metallic silver plastic case, bears N. 45° E., 10 ft. dist., buried 18 ins. below ground.
A magnet, in a fluorescent pink plastic case, bears S. 45° E., 10 ft. dist., buried 18 ins. below ground.
Deposit a magnet, in a clear plastic case, at the base of the stainless steel post.
Buried the 2 in. by 2 in. hub upside-down next to the monument.




Found an iron pipe, 4 ins. diam., firmly set, projecting 8 ins. above the ground, with an iron cap, punched "S1537 C4" on the Southeast side, there are more unreadable punches, from which
A spruce, 11 ins. diam., bears S. 55° W., 46.9 ft. dist., with a healed scar.
A spruce, 12 ins. diam., bears N. 32° W., 33.7 ft. dist., with a healed scar.
Original pits not discernible and no new accessories taken.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 40 ins. in the ground, with brass cap mkd. as shown, from which
A magnet, in a metallic silver plastic case, bears N. 45° E., 10 ft. dist., buried 18 ins. below ground.
A magnet, in a fluorescent pink plastic case, bears S. 45° E., 10 ft. dist., buried 18 ins. below ground.
Deposit a magnet, in a clear plastic case, at the base of the stainless steel post.



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown, from which
A magnet, in a fluorescent pink plastic case, bears S. 45° E., 10 ft. dist., buried 18 ins. below ground.
A magnet, in a fluorescent blue plastic case, bears S. 45° W., 10 ft. dist., buried 18 ins. below ground.
Deposit a magnet, in a clear plastic case, at the base of the stainless steel post.



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown, from which
A magnet, in a metallic silver plastic case, bears N. 45° E., 10 ft. dist., buried 18 ins. below ground.
A magnet, in a fluorescent pink plastic case, bears S. 45° W., 10 ft. dist., buried 18 ins. below ground.
Deposit a magnet, in a clear plastic case, at the base of the stainless steel post.




Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 25 ins. in the ground, with brass cap mkd. as shown, from which
A magnet, in a fluorescent pink plastic case, bears S. 45° E., 10 ft. dist., buried 18 ins. below ground.
A magnet, in a fluorescent blue plastic case, bears S. 45° W., 10 ft. dist., buried 18 ins. below ground.
Deposit a magnet, in a clear plastic case, at the base of the stainless steel post.



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown, from which
A magnet, in a fluorescent blue plastic case, bears S. 45° W., 10 ft. dist., buried 18 ins. below ground.
A magnet, in a fluorescent orange plastic case, bears N. 45° W., 10 ft. dist., buried 18 ins. below ground.
Deposit a magnet, in a clear plastic case, at the base of the stainless steel post.



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown, from which
A magnet, in a fluorescent blue plastic case, bears S. 45° W., 10 ft. dist., buried 18 ins. below ground.
A magnet, in a fluorescent orange plastic case, bears N. 45° W., 10 ft. dist., buried 18 ins. below ground.
Deposit a magnet, in a clear plastic case, at the base of the stainless steel post.



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown, from which
A magnet, in a metallic silver plastic case, bears N. 45° E., 10 ft. dist., buried 18 ins. below ground.
A magnet, in a fluorescent pink plastic case, bears S. 45° E., 10 ft. dist., buried 18 ins. below ground.
Deposit a magnet, in a clear plastic case, at the base of the stainless steel post.



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown, from which
A magnet, in a metallic silver plastic case, bears N. 45° E., 10 ft. dist., buried 18 ins. below ground.
A magnet, in a fluorescent pink plastic case, bears S. 45° E., 10 ft. dist., buried 18 ins. below ground.
Deposit a magnet, in a clear plastic case, at the base of the stainless steel post.



Set a stainless steel post, 28 ins. long, 2 1/2 ins. diam., 26 ins. in the ground, with brass cap mkd. as shown, from which
A magnet, in a fluorescent pink plastic case, bears S. 45° E., 10 ft. dist., buried 18 ins. below ground.
A magnet, in a fluorescent blue plastic case, bears S. 45° W., 10 ft. dist., buried 18 ins. below ground.
Deposit a magnet, in a clear plastic case, at the base of the stainless steel post.

2004-1
Kivichuk REC DIST
Date March 30 2004
Time 11:11 AM
Requested By BLM
Address



United States Department of the Interior



BUREAU OF LAND MANAGEMENT
ALASKA STATE OFFICE
222 W. 7th Avenue, #13
ANCHORAGE, ALASKA 99513-7599

9600 (920)
ANCSA 14(c)
LEVELOCK

March 26, 2004

KVICHAK RECORDING DISTRICT
3601 C Street, Suite 1140
Anchorage, Alaska 99503

Dear District Recorder:

The Alaska Native Claims Settlement Act (ANCSA) Section 14(c) plat for Levelock, Tracts A Through K; the subdivision of Lot 8, U.S. Survey 3529; and the subdivision of Tract B, U.S. Survey 4877, consisting of ten (10) original sheets, transmitted to you by this letter of compliance, portrays a Cadastral Survey conducted to fulfill statutory requirements mandated by ANCSA, pursuant to Public Law 92-203 (Stat. 688, 702, 703), and satisfies the federal guidelines and requirements proclaimed for ANCSA 14(c) Surveys.

The plat represents surveyed parcels of land selected for ANCSA 14(c) reconveyances situated on portions of surface estate lands transferred from the United States of America by Interim Conveyance No. 193 and Patent Nos. 50-79-0092 and 50-89-0751, all to Levelock Natives, Limited.

ANCSA 14(c) Surveys have been authorized as federally mandated surveys, under the provisions of Section 13 of ANCSA, 43 U.S.C. Stat. 1612. The authority to execute all federal land surveys in Alaska is delegated by the Secretary of the Interior to the Director, Bureau of Land Management (BLM) and subsequently redelegated to the Deputy State Director for Cadastral Survey, Alaska State Office. Accordingly, BLM requests that this plat be filed with the KVICHAK RECORDING DISTRICT to comply with the federal platting regulations and the agreements set forth between the Bureau of Land Management and the State Recording Authority.

Sincerely,

Gust C. Panos
Acting Deputy State Director
for Cadastral Survey, Alaska

KVICHAK 2004-1